



TECHNICAL DATA SHEET

1500-S-016

1500 SERIES SURFACE SWITCHES



Description

A range of surface switch plate is designed for ease of installation and having all the advantages and design features. These products can be quickly installed as replacements for existing switch plate or in new installations.

Features

- Breakthrough in style with quality plate finishes of pleasant curved & classic design
- Use of high impact resistant material, flame retarding & UV stabilized polycarbonate
- Front plates with high gloss finishing offering long lasting protection
- Innovative front fitting modular system with resist frontal impact
- This modular system provides maintenance versatility and cost effective
- Switch mechanism constructed in compact & simple manner with minimum parts
- Large terminal faces to provide maximum installer versatility even in confined spaces

Main Application

Suitable for switching fluorescent or inductive loads at areas such as living room, bedroom & kitchen

Materials & Finish

- Use of polycarbonate for all plastic components
- Brass & Copper for all conductivity components
- All contact point is silver welded for best performance

Option

Accessories and color options upon request

Standards & Approvals

Switches comply:
BSEN / IEC 60669-1

Quantity

Box Quantity : 10 pcs
Outer Box : 100 pcs

TECHNICAL SPECIFICATION

Electrical

Voltage rating: 250V a.c.

Unit	Rating	Terminal capacity
10A switches	10AX	4 x 1.5mm ²



Physical

Ambient operating temperature: -5°C to +40°C
Max. installation altitude: 2000 meters


Dimension

Plate Size	:	66mm diameter
Mounting Centres	:	50mm at 45°



WIRING DIAGRAM & DIMENSION (mm)

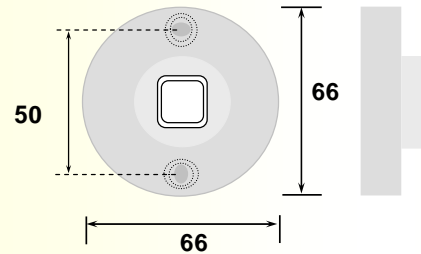

Rear view of 1572
1 Way Single Pole Switch Plate



1 Way Single Pole



2 Way Single Pole

PRODUCT RANGE

Surface Switch with 10AX Modules

Description

- 1 Way Single Pole
- 2 Way Single Pole

CAT No.

- 1572/1W
- 1572/2W