

**1500 SERIES CONTROL SWITCHES
(37Amp Switch Plate)**

1537N
TECHNICAL SPECIFICATION
Electrical

Voltage rating: 440V a.c.
 Rated impulse withstand Voltage: 1.5kV a.c. RMS
 Pollution Degree: 3
 Rated Duty: Infrequent operation
 Rated short time withstand current:
 420A for 1 sec at 0.95pf
 Rated short circuit making capacity: 0.5kAp

| Unit | Rating | Terminal capacity |
|--------------|--------|-------------------------|
| 37A switches | 37A | 1 x 16.0mm ² |

Physical

Ambient operating temperature: -5°C to +40°C
 Max. installation altitude: 2000 meters

| Dimension | L X W X H |
|------------------|---------------------|
| Plate Size | : 146 x 86 x 10.5mm |
| Mounting Centres | : 120.6mm |

PRODUCT RANGE
Plate Switches with 37Amp

Description
 1 Gang 1 Way Triple Pole with Neon

CAT No.
 1537N

Description

A range of switch plate is designed for ease of installation and having all the advantages and design features. These products can be quickly installed as replacements for existing switch plate or in new installations.

Features

- Breakthrough in style with quality plate finishes of pleasant curved design
- Use of high impact resistant material, flame retarding & UV stabilized polycarbonate
- Thin front plates with high gloss finishing offering long lasting protection
- Switch mechanism constructed in compact & simple manner with minimum parts
- Large terminal faces placed in synchronize direction to provide maximum installer versatility even in confined spaces
- Mounting screws which is exposed are covered with screw caps giving a stylish finishes
- Prevent current leaks to the appliances in case of potential faulty wiring

Main Application

Suitable for switching motor operated device such as Air Conditioner, Water Heater, Cooker and etc

Materials & Finish

- Use of polycarbonate for all plastic components
- Brass & Copper for all conductivity components
- All contact point is silver plated for best performance

Option

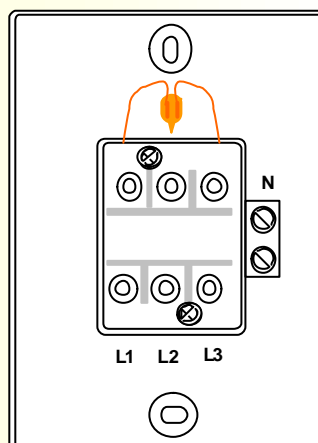
Accessories and color options upon request

Standards & Approvals

Switches comply:
 BSEN / IEC 60947-3

Quantity

Box Quantity : 5 pcs
 Outer Box : 50 pcs

WIRING DIAGRAM

Rear View of 1537N
