



# TECHNICAL DATA SHEET

1500-O-002

## 1500 SERIES CORD OUTLETS



1536



1544

### Description

A range of cord outlet is designed for ease of installation and having all the advantages and design features. These products can be quickly installed as replacements for existing switch plate or in new installations.

### Features

- Breakthrough in style with quality plate finishes of pleasant curved design
- Thin front plates with high gloss finishing offering long lasting protection
- Use of high impact resistant material, flame retarding & UV stabilized polycarbonate
- Socket mechanism constructed in compact & simple manner with minimum parts
- Switch contacts with silver contact points on both surfaces for good continuity
- Large terminal faces placed in synchronize direction to provide maximum installer versatility even in confined spaces

### Main Application

Suitable for switching to loads at areas such as living room, bedroom & kitchen. Commercial areas such as shopping complex, restaurants, cafeterias, hotel & etc

### Materials & Finish

- Use of polycarbonate for all plastic components
- Brass & Copper for all conductivity components
- All contact point is silver welded for best performance

### Option

Accessories and color options upon request

### Standards & Approvals

Sockets comply: BS 5733

### Quantity

Box Quantity : 10 pcs  
Outer Box : 100 pcs

## TECHNICAL SPECIFICATION

### Electrical

Voltage rating: 250V a.c.

Unit	Rating	Terminal Capacity
20A Cord Outlet	20A	3 x 2.5mm <sup>2</sup> , 2 x 4.0mm <sup>2</sup>
45A Cord Outlet	45A	4 x 4.0mm <sup>2</sup> , 3 x 6.0mm <sup>2</sup> 1 x 10.0mm <sup>2</sup> , 1 x 16.0mm <sup>2</sup>

### Physical


Ambient operating temperature: -5°C to +40°C

Max. installation altitude: 2000 meters

### Dimension

Dimension	L X W X H
Plate Size	: 86 x 86 x 12.5mm
Mounting Centres	: 60.3mm

## DIMENSION (mm)

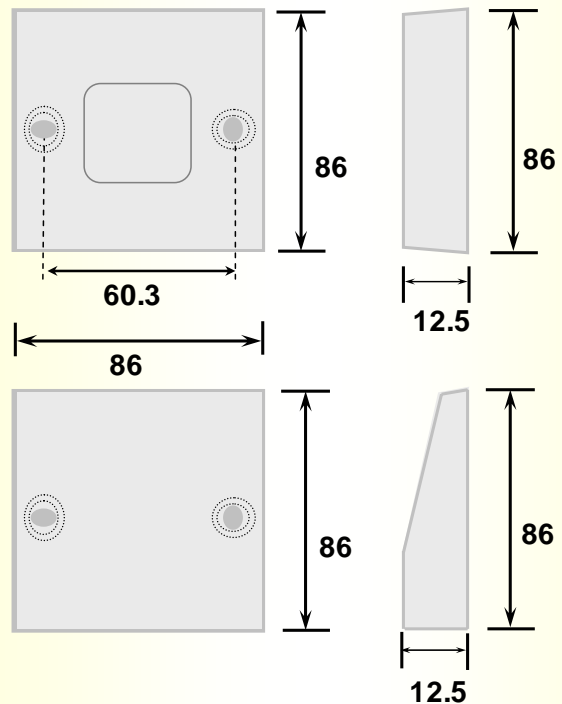

## PRODUCT RANGE

### Cord Outlets

Description	CAT No.
1 Gang 20A Cord Outlet Unswitched with Terminal Block	1536
1 Gang 45A Cord Outlet Unswitched with Terminal Block	1544