



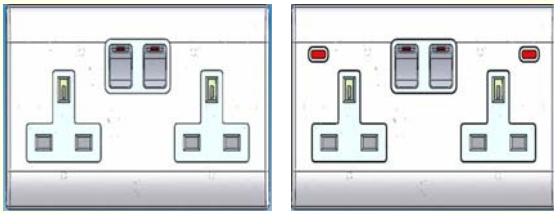

TECHNICAL DATA SHEET

DECOR-O-001

DÉCOR SERIES 13Amp SOCKET OUTLETS

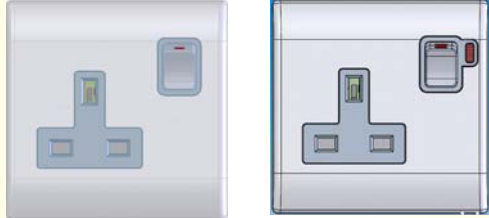

Description

This décor range socket outlet is designed for ease of installation and having all the advantages and design features. These products can be quickly installed as replacements for existing switch plate or in new installations.

Features

- Use of high impact resistant material, flame retarding & UV stabilized polycarbonate
- Socket mechanism constructed in compact & simple manner with minimum parts
- Patented earthing system which is unique – direct contact to mounting screw
- Large terminal faces to provide maximum installer versatility even in confined spaces
- Base plate is well designed to withstand any force applied by insertion of plugs or the operation of switches
- Interchangeable cover plates that comes with various selection of decoration colors with an elegant, gloss finish that is easy to clean
- Contain a unique 3 pin operated safety shutter

Main Application

Suitable for switching to loads at areas such as living room, bedroom & kitchen. Commercial areas such as shopping complex, restaurants, cafeterias, hotel & etc

Materials & Finish

- Use of polycarbonate for all plastic components
- Brass & Copper for all conductivity components
- All contact point is silver welded for best performance

Option

Accessories and color options upon request

Standards & Approvals

Switched Socket comply: BS 1363 Pt2

Quantity

Box Quantity : 10 pcs
Outer Box : 100 pcs

TECHNICAL SPECIFICATION

Electrical

Voltage rating: 250V a.c.

Unit	Rating	Terminal capacity
13A Socket	13A	4 x 2.5mm ² , 3 x 4.0mm ²

Physical

Ambient operating temperature: -5°C to +40°C

Max. installation altitude: 2000 meters

Dimension

	L X W X H
1 Gang Plate Size	89 x 89 x 6.7mm
Mounting Centres	60.3mm
2 Gang Plate Size	149 x 89 x 6.7mm
Mounting Centres	120.6mm

PRODUCT RANGE

13A Switched Socket Outlets

Description	CAT No.
1 Gang Single Pole (SP)	1661L
1 Gang SP with Neon Indicator	1661LN
2 Gang SP	1662L
2 Gang SP with Neon Indicator	1662LN

WIRING DIAGRAM

