




TECHNICAL DATA SHEET

1600-O-007

1600 DESIGNER SERIES 13Amp SOCKET OUTLETS

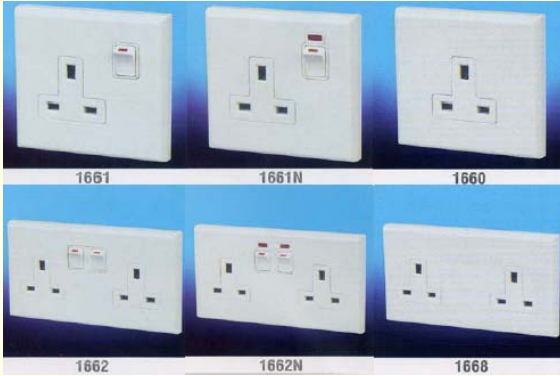

Description

This socket outlet is designed for ease of installation and having all the advantages and design features. These products can be quickly installed as replacements for existing switch plate or in new installations.

Features

- Use of high impact resistant material, flame retarding & UV stabilized polycarbonate
- Socket mechanism constructed in compact & simple manner with minimum parts
- Patented earthing system which is unique – direct contact to mounting screw
- Large terminal faces to provide maximum installer versatility even in confined spaces
- Base plate is well designed to withstand any force applied by insertion of plugs or the operation of switches
- Clip on covers conceal mounting screws, simplify finishing & decorating
- Cover plate comes in metal & polycarbonate with quality gloss finish
- Contain a unique 3 pin operated safety shutter

Main Application

Suitable for switching to loads at areas such as living room, bedroom & kitchen. Commercial areas such as shopping complex, restaurants, cafeterias, hotel & etc

Materials & Finish

- Use of polycarbonate for all plastic components
- Brass & Copper for all conductivity components
- All contact point is silver welded for best performance

Option

Accessories and color options upon request

Standards & Approvals

Switched Socket comply: BS 1363 Pt 2

Quantity

Box Quantity : 10 pcs
Outer Box : 100 pcs

TECHNICAL SPECIFICATION

Electrical

Voltage rating: 250V a.c.

Unit	Rating	Terminal capacity
13A Socket	13A	4 x 2.5mm ² , 3 x 4.0mm ²

Physical

Ambient operating temperature: -5°C to +40°C

Max. installation altitude: 2000 meters

Dimension

	L X W X H
1 Gang Plate Size :	89 x 89 x 12.5mm
Mounting Centres :	60.3mm
2 Gang Plate Size :	149 x 89 x 12.5mm
Mounting Centres :	120.6mm

PRODUCT RANGE




13A Switched Socket Outlets

Description	CAT No.
1 Gang Single Pole (SP)	1661
1 Gang SP with Neon Indicator	1661N
2 Gang SP	1662
2 Gang SP with Neon Indicator	1662N





13A Unswitched Socket Outlets

Description	CAT No.
1 Gang Unswitched	1660
2 Gang Unswitched	1668

WIRING DIAGRAM



1660 1 Gang Single Pole Unswitched Socket



1668 2 Gang Single Pole Unswitched Socket

